

OPERATING TABLE

MODEL: OP-4P
ORDER NUMBER: 11.1167



PRODUCT FEATURES

General Features

The Number of Mattresses	6
Mattress Materials	PU
Mattress Thickness	60 mm
Maximum Carrying Capacity	450 kgs
Table Top Dimension	610mm×2200mm (±30mm)
Wheel Features	1 pc Spherical Front Wheel, Ø80x30 2 pcs. Double Rear Wheel, Ø125x46 mm
Classification	Class I, EU 2017/745 MDR
Standards	EN 60601-1, EN 60601-1-2, EN IEC 60601-2-46
Regulatory Compliance	CE

Material Specifications

Compact and Polyurethane materials with high X-Ray permeability are used on the operating table top.

Stainless steel (AISI 304, DIN X5CrNi18-10)

Hand control, ABS material

Packaging Features

Dead Weight	245 kgs
Gross Weight	280 kgs
Dimensions	740x1440x1050 mm

Electrical Properties

Inlet Voltage	220-240 VAC / 50-60 Hz
Working Voltage	24 VDC
Fuse Type	2 x 2A glass fuse
Battery Duration	30 Full Movement
Battery Type	2 x 12 V
Battery Charge Time	9 Hours
Electrical Protection Class	Class I

Table Positions

OP-4P model operating tables performs electrical movements with hydraulic pistons. Mechanical movements are performed by gas pistons. Kidney surgery movement is done through a mechanical lever.

Electromechanical Positions

Height Adjustment
Trendelenburg/Reverse Trendelenburg
Lateral Tilt Left/Right
Back Section
Sliding

Mechanical Movements

Head Rest
Leg Rests, Up / Down
Kidney Elevator(optional)

Accessories

OM-100	Anaesthesia Screen
OM-110	Infusion Rod
OM-120	Arm Support
OM-150	Body Strap
OM-152	Hand Wrist Strap

OPERATING TABLE

MODEL: OP-4P


ORDER NUMBER: 11.1167

TABLE POSITIONS

Height Adjustment


Hydraulic lift is used for up and down movement.

670 mm - 1090 mm
without mattress

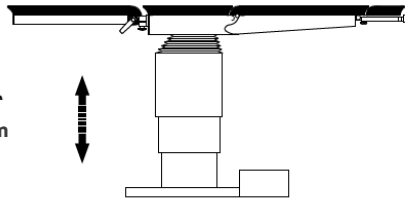



Trendelenburg / Reverse Trendelenburg

Hydraulic piston is used.

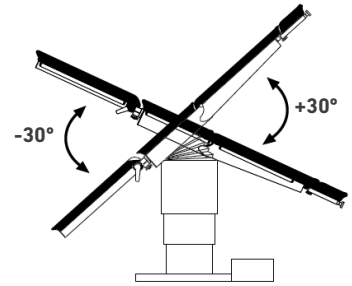


Lateral Tilt Movement

Hydraulic piston is used.

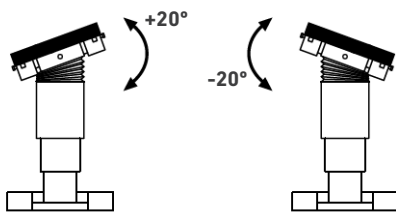


Leg Rests, Up/Down
2x500 N gas springs




Back Rest Movement

2 hydraulic pistons are used for the back. Movement Kidney surgery position: 220° (optional)




Head Rest Movement

2x300 N gas springs for head rest movement

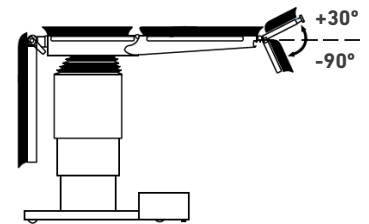


Sliding Movement

Hydraulic piston for sliding movement.




Flex

Hydraulic pistons are used to move the Flex.

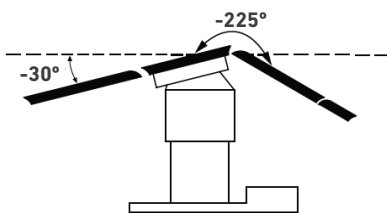

Reflex

Hydraulic pistons are used to move the Reflex.

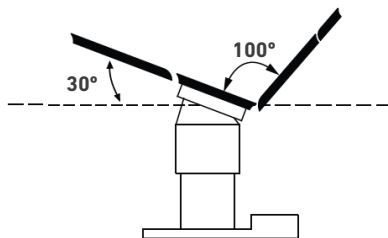

Electro-Hydraulic Movements

- Height
- Back Rest
- Trendelenburg
- Reverse Trendelenburg
- Lateral Tilt
- Sliding
- Central Locking
- Flex & Reflex
- Brake



OPERATING TABLE

MODEL: OP-4P

ORDER NUMBER: 11.1167

MATTRESS PROPERTIES

The mattresses used in operating tables are made of cleanable polyurethane material with antibacterial properties.

